



Getting To Know Your AMP

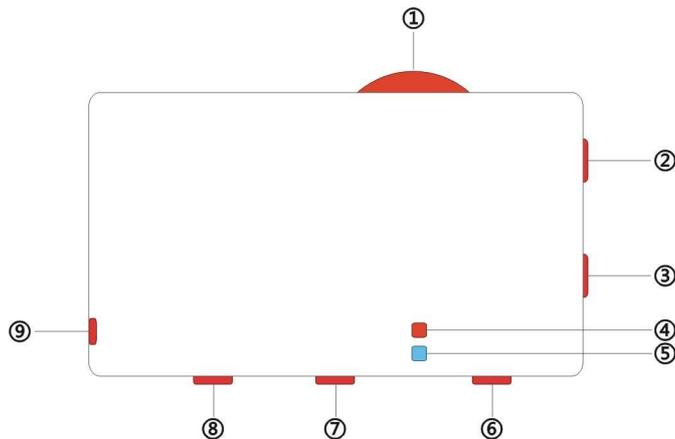

- (1)Volume control
- (2)Input Jack
- (3)Output Jack
- (4)Charge Lamp (Red)
- (5)Power lamp (Blue)
- (6)Power Switch
- (7)Gain Switch 2
- (8)Gain Switch 1
- (9)Charge Jack



- Gain Switchs position= (1, 3), Gain= 0dB;
- (1, 4), Gain= +3dB;
- (2, 3), Gain= +8dB
- (2, 4), Gain= +10dB.

Contents:

iBasso T3 body, AC adapter, USB cable, connection Cables, and Leather pouch.

⚠ Caution:

To protect your hearing, please follow the operation guide and do not listen at extremely high volume levels. Extended high volume listening can lead to permanent hearing loss.

Charging the Battery:

When the power lamp is flashing, the battery needs to be charged. Use the furnished AC adapter and USB cable to charge the battery. It usually takes about 2.5 hours to

charge a completely drained battery. At the point the charge lamp (Red lamp on the T3) goes off, the battery is fully charged. Also, the T3 can be charged via USB port of computer system. The T3 has overcharge protection; you can leave the T3 plugged and no over-charging concerns.

Warranty:

iBasso Hi-Definition portable headphone amplifier T3 (excluding the accessories) to be free from malfunctions and defects in both materials and workmanship for one year from the date of purchase. Buyer should retain the warranty card. The warranty card will be required with any request for warranty repair.

This warranty does not apply when failure is due to, accident alteration, water infiltration, modification, unauthorized service, misuse, abuse, use with incompatible accessories or attachments, failure to follow operations, or claim made after the duration of this warranty.

For further product and warranty information, please go to www.iBasso.com.

Specifications:

- Power Source: Built-in rechargeable Li-Polymer Battery
- Frequency Response: 20Hz~100 KHz/ -0.5dB
- Signal to Noise Ratio: -98dB
- Crosstalk: 94dB
- Gain: 0dB/+3dB/+8dB/+10dB
- Total Harmonic Distortion: <0.0015% @1kHz/0dB
- Maximum Output power: 120mW+120mW
- Battery Life: 38 Hours
- Battery Charge Time: 2.5 Hours
- Recommended Headphone Impedance: 8~300Ω
- Input Terminal: Mini-stereo (3.5mm)
- Output Terminal: Mini-stereo (3.5mm)
- Case dimension: 2.51L x 1.46W x 0.39H (inch)
64.5L x 37W x 10H (mm)
- Weight: 28g