


Getting To Know Your AMP

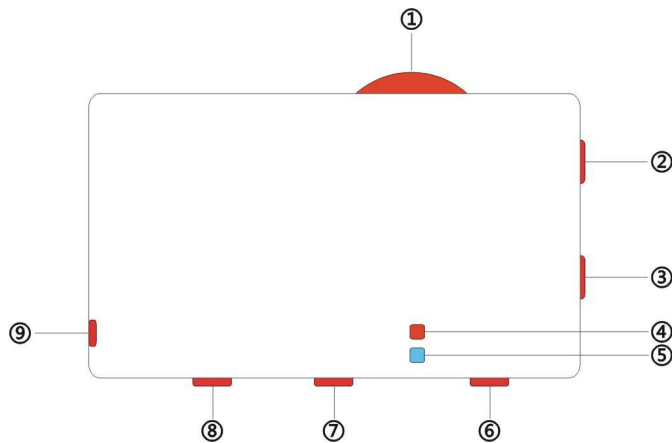

- (1) Volume control wheel
- (2) Input Jack
- (3) Output Jack
- (4) Charge Lamp (Red)
- (5) Power lamp (Blue)
- (6) Power Switch
- (7) Bass Switch
- (8) Gain switch
- (9) Charge Jack

Contents:

iBasso T4 body, AC adapter, USB cable, connection Cables, and Leather pouch.

Caution:

To protect your hearing, please follow the operation guide and do not listen at extremely high volume levels. Extended high volume listening can lead to permanent hearing loss.

Charging the Battery:

When the power lamp is flashing, the battery needs to be charged. Use the furnished AC adapter and USB cable to charge the battery. It usually takes about 3 hours to charge a completely drained battery. At the point the charge lamp (Red lamp on the T4) goes off, the battery is fully charged. Also, T4 can be charged via USB port of computer system. The T4 has overcharge protection; you can leave the T4 plugged and no over-charging concerns.

Warranty:

iBasso Hi-Definition portable headphone amplifier T4 (excluding the accessories) to be free from malfunctions and defects in both materials and workmanship for one year from the date of purchase. Buyer should retain the warranty card. The warranty card will be required with any request for warranty repair.

This warranty does not apply when failure is due to, accident alteration, water infiltration, modification, unauthorized service, misuse, abuse, use with incompatible accessories or attachments, failure to follow operations, or claim made after the duration of this warranty.

For further product and warranty information, please go to www.iBasso.com.

Specifications:

- Power Source: Built-in rechargeable Lithium Polymer Battery, or external power supply
- Frequency Response: 20Hz~100 KHz/ -0.5dB
- Signal to Noise Ratio: -104dB
- Crosstalk: 98dB
- Gain: 3dB/10dB
- Bass Booster: 120Hz 0dB/+3dB
- Total Harmonic Distortion: <0.00012% @1kHz/0dB
- Maximum Output power: 120mW+120mW
- Battery Life: 24 Hours
- Battery Charge Time: 3 Hours
- External Power supply: 5V DC/USB Cable
- Recommended Headphone Impedance: 8~300Ω
- Input Terminal: Mini-stereo (3.5mm)
- Output Terminal: Mini-stereo (3.5mm)
- Case dimension: 2.51L x 1.46W x 0.39H (inch)
64.5L x 37W x 10H (mm)
- Weight: 29g